

# Work specification

## Job Information:

**Job Name:**

Autodok Internett

**Job Id:**

02929-23-746828

**Job Type:**

Access

**Responsible:**

alfnes, Alf Nesdal

**Requested done:**

03/03/2023

**Agreed done:**

**Project description:**

Created by LSD

## Design Information:

**Full Design Name:**

746828

**Status:**

Under Routing

**Owner:**

alfnes

**Responsible:**

NI User

**Last Change by:**

roypet

**Last Change on:**

24/02/2023

**Note:**

Contractor must contact:

Network operation Services, tel. +47 21550350, when installing IP based services.

Network operation Transmission, tel. +47 21550379, for WDM or SDH based services.


Homenet: When installing ASR switches, - call +47 38990101.

The installation must be documented with photos, which are sent to the client.

New equipment must be marked with GlobalConnect stickers.

New services must be tested or approved by Network operation before leaving the location.

The contractor must check whether all equipment has been received. This applies to both GlobalConnect warehouses and external suppliers.

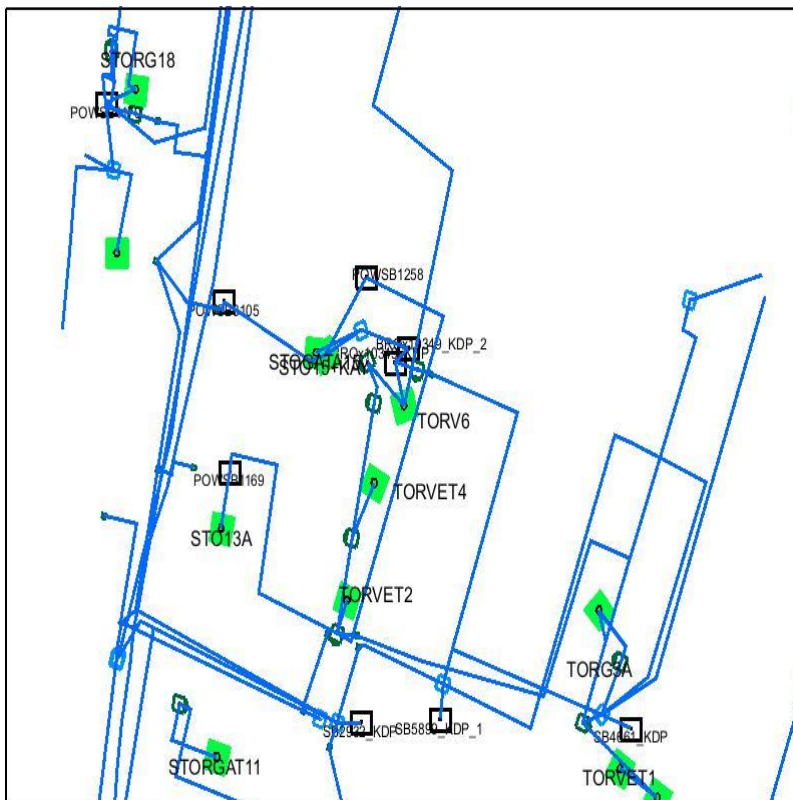

## **Equipment identification:**

### **New sheaths:**

BROf90531 G4, U4

## Associated connection:

[F] is for Facility, which is a physical connection between two units.  
In case of status «Reserved», this should be connected.  
In case of status «In Service», this is already connected.

### Circuit:

[C] Lillestrøm/LILLSS-Lillestrøm/TORV6\_TEMPe1 GE-FA28060879

### Logical port info:

LILLSS.LILLSS\_FS\_5.XGigabitEthernet3/0/34 ---  
TORV6\_TEMPe1.TORV6\_TEMPe1\_CE\_2.WAN

### Facility:

[F] BROx10349\_KD-TORV6\_TEMPe1 2F0001, Planned

### Logical port info:

BROx10349\_KDP\_2.BROx10349\_KDP\_WDM\_2 .1430 ---  
TORV6\_TEMPe1.TORV6\_TEMPe1\_CE\_2.WAN

### Physical port info:

#### Port connections fiber 1:

Bay: BROx10349\_KDP\_WDM\_2, Card: BROx10349\_KDP\_WDM\_2, Port: TX 1430,  
Connector: LC

Room: TORV6\_TEMPe1, Bay: HAPPY CATERING AS, Shelf:  
TORV6\_TEMPe1\_ODF\_0101, Port: 02, Connector: SC/PC  
Room: TORV6\_TEMPe1, Shelf: TORV6\_TEMPe1\_CE\_1, Slot: XG6846-R1, Card:  
XG6846-R1, Slot: WAN, Card: SFP-C1430/40, Port: Out, Connector: LC

#### Port connections fiber 2:

Bay: BROx10349\_KDP\_WDM\_2, Card: BROx10349\_KDP\_WDM\_2, Port: RX 1430,  
Connector: LC

Room: TORV6\_TEMPe1, Bay: HAPPY CATERING AS, Shelf:  
TORV6\_TEMPe1\_ODF\_0101, Port: 01, Connector: SC/PC  
Room: TORV6\_TEMPe1, Shelf: TORV6\_TEMPe1\_CE\_1, Slot: XG6846-R1, Card:  
XG6846-R1, Slot: WAN, Card: SFP-C1430/40, Port: In, Connector: LC

### Facility:

[F] LILLSS 2F0281, Planned

### Logical port info:

LILLSS.LILLSS\_FS\_5.XGigabitEthernet3/0/34 ---  
LILLSS.LILLSS\_ODF\_WDM\_100.9.1430

### Physical port info:

**Port connections fiber 1:**

Room: LILLSS, Bay: LILLSS\_AGG\_1/PE\_1, Shelf: LILLSS\_FS\_5, Slot: 03, Card: LE1D2X48SX2S, Slot: 34, Card: SFP-C1430/40, Port: In, Connector: LC

Room: LILLSS, Bay: Ventelo, Shelf: LILLSS\_ODF\_WDM\_100, Slot: 9, Card: LILLSS\_ODF\_WDM\_100.9, Port: RX 1430, Connector: LC

**Port connections fiber 2:**

Room: LILLSS, Bay: LILLSS\_AGG\_1/PE\_1, Shelf: LILLSS\_FS\_5, Slot: 03, Card: LE1D2X48SX2S, Slot: 34, Card: SFP-C1430/40, Port: Out, Connector: LC

Room: LILLSS, Bay: Ventelo, Shelf: LILLSS\_ODF\_WDM\_100, Slot: 9, Card: LILLSS\_ODF\_WDM\_100.9, Port: TX 1430, Connector: LC

## Connection information:

### BROx10349\_KD-TORV6\_TEMPe1 2F0001:



Terminal Enclosure: BROx10349\_KDP\_2, Adresse ikke satt  
Rack: BROx10349\_KDP\_WDM\_2  
Hylle:  
Port: TX 1430,RX 1430



Ny BROf90531 G4 (10.20 m)  
Fiber: 2,1



Building: TORV6, TORVET 6  
Rom: TORV6\_TEMPe1  
Rack: HAPPY CATERING AS  
Hylle: TORV6\_TEMPe1\_ODF\_0101, Eq ID:GTW91753  
Port: 02,01



Port-Port



Building: TORV6, TORVET 6  
Rom: TORV6\_TEMPe1  
Rack:  
Hylle: TORV6\_TEMPe1\_CE\_1, Eq ID:JED76492  
Port: Out,In

Total kabel lengde: 10.20 m

### LILLSS 2F0281:



Building: LILLSS, JONAS LIES GATE 4  
Rom: LILLSS  
Rack: LILLSS\_AGG\_1/PE\_1  
Hylle: LILLSS\_FS\_5, Eq ID:  
Port: XGE3/0/34 -1430/40 Huawei



Port-Port



Building: LILLSS, JONAS LIES GATE 4  
Rom: LILLSS  
Rack: Ventelo  
Hylle: LILLSS\_ODF\_WDM\_100, Eq ID:  
Port: RX 1430,TX 1430

Total kabel lengde: 0.00 m